


4 PLCS Mounting Hole
M6 Tap 9mm Deep



Weight
Type of construction
Mechanical format
Size
Design
Format
Preload class
Accuracy class
Seal
Ball retainer
Lubrication
Bearing grease
Fitting

0.50 kg
FW runner block
KWD Ball runner block
25
SNS Flanged, normal, standard height
CS Carbon steel
C1 low preload
N Normal
SS Standard seal
0 Without ball retainer
01 Prelubricated, preserved
S1 Dynalub 510
M6X9

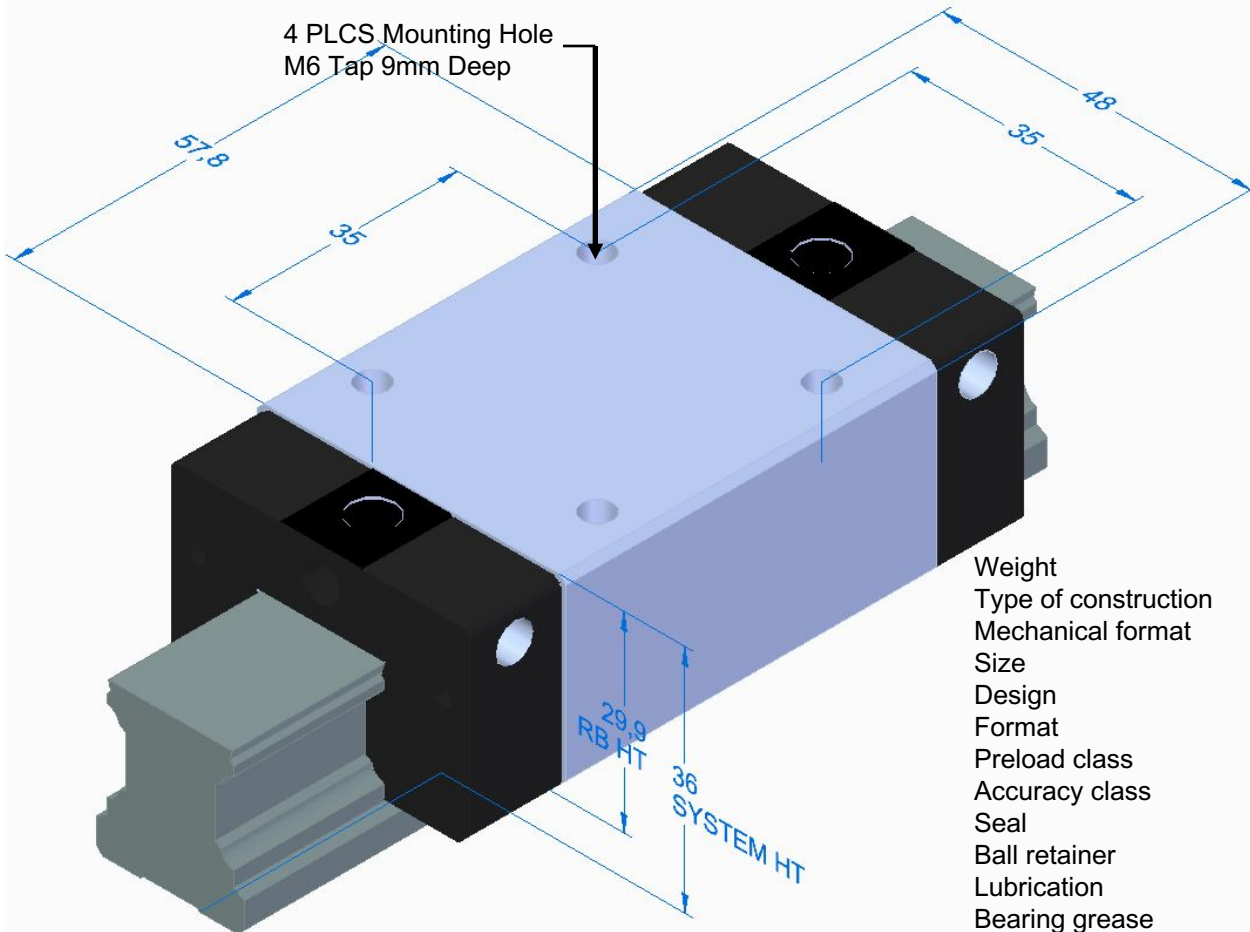

10 MILLION METER RELUBRICATION SCHEDULE

RATINGS

28,600 N	Basic Dynamic Capacity	6530	lbs
35,900 N	Static Capacity	8071	lbs
410 Nm	Roll Moment Dynamic Capacity	302	ft-lbs
510 Nm	Roll Moment Static Capacity	346	ft-lbs
290 Nm	Pitch/Yaw Moment Dynamic Capacity	214	ft-lbs
360 Nm	Pitch/Yaw Moment Static Capacity	266	ft-lbs

ENGLISH

Bosch Rexroth BSHP Ball Rail Runner Block
KWD-025-SNS-CS-C1-N-SS-0-01-S1-00-BX-LS-000-RS-000-01

PN: 1622-214-20



www.evolutionmotion.com

rexroth
A Bosch Company

UNITS : mm