


4 PLCS Mounting Hole
M6 Tap 9mm Deep



Low Drag Runner Block Version
No End Seals – Oil Preserved

**Ball Rail &
Runner Block**

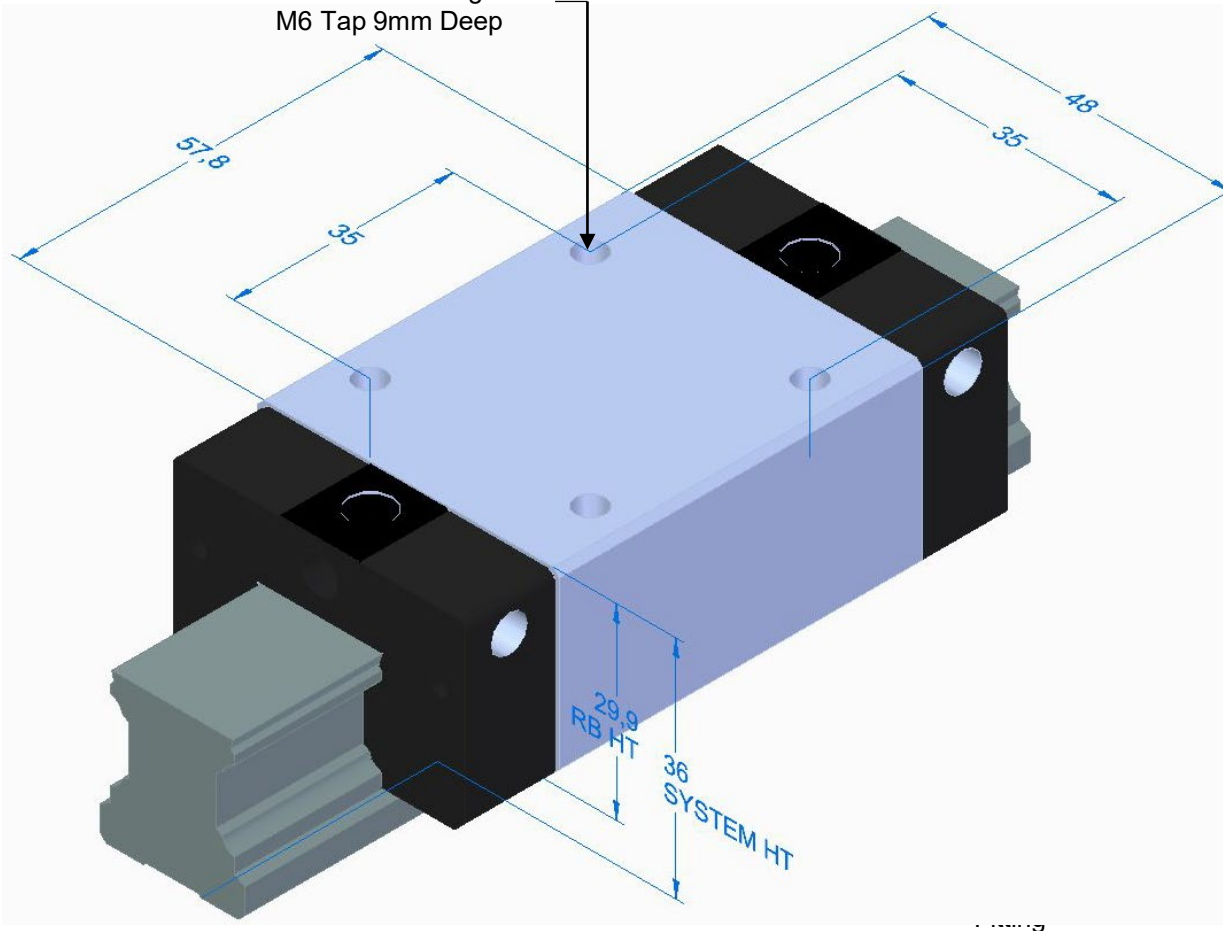

**STOCKING
PROGRAM**

0.50 kg
FW runner block
KWD Ball runner block
25
SNS Slim, normal, standard height
CS Carbon steel
C0 – 10 micron clearance
N Normal
LS/99 – Low Friction/No seal
0 Without ball retainer
02 Preserved
00 No Lube
M6X9

10 MILLION METER RELUBRICATION SCHEDULE

RATINGS

28,600 N Basic Dynamic Capacity
35,900 N Static Capacity
410 Nm Roll Moment Dynamic Capacity
510 Nm Roll Moment Static Capacity
290 Nm Pitch/Yaw Moment Dynamic Capacity
360 Nm Pitch/Yaw Moment Static Capacity

ENGLISH

6530 lbs
8071 lbs
302 ft-lbs
346 ft-lbs
214 ft-lbs
266 ft-lbs

Bosch Rexroth BSHP Ball Rail Runner Block
KWD-025-SNS-CS-C0-N-LS/99-0-02-00-BX-LS-000-RS-000-01

PN: 1622-294-25_R030101329_LD

Low Drag



www.evolutionmotion.com

rexroth
A Bosch Company

UNITS : mm