


4 PLCS Mounting Hole
M5 Tap 7.5mm Deep

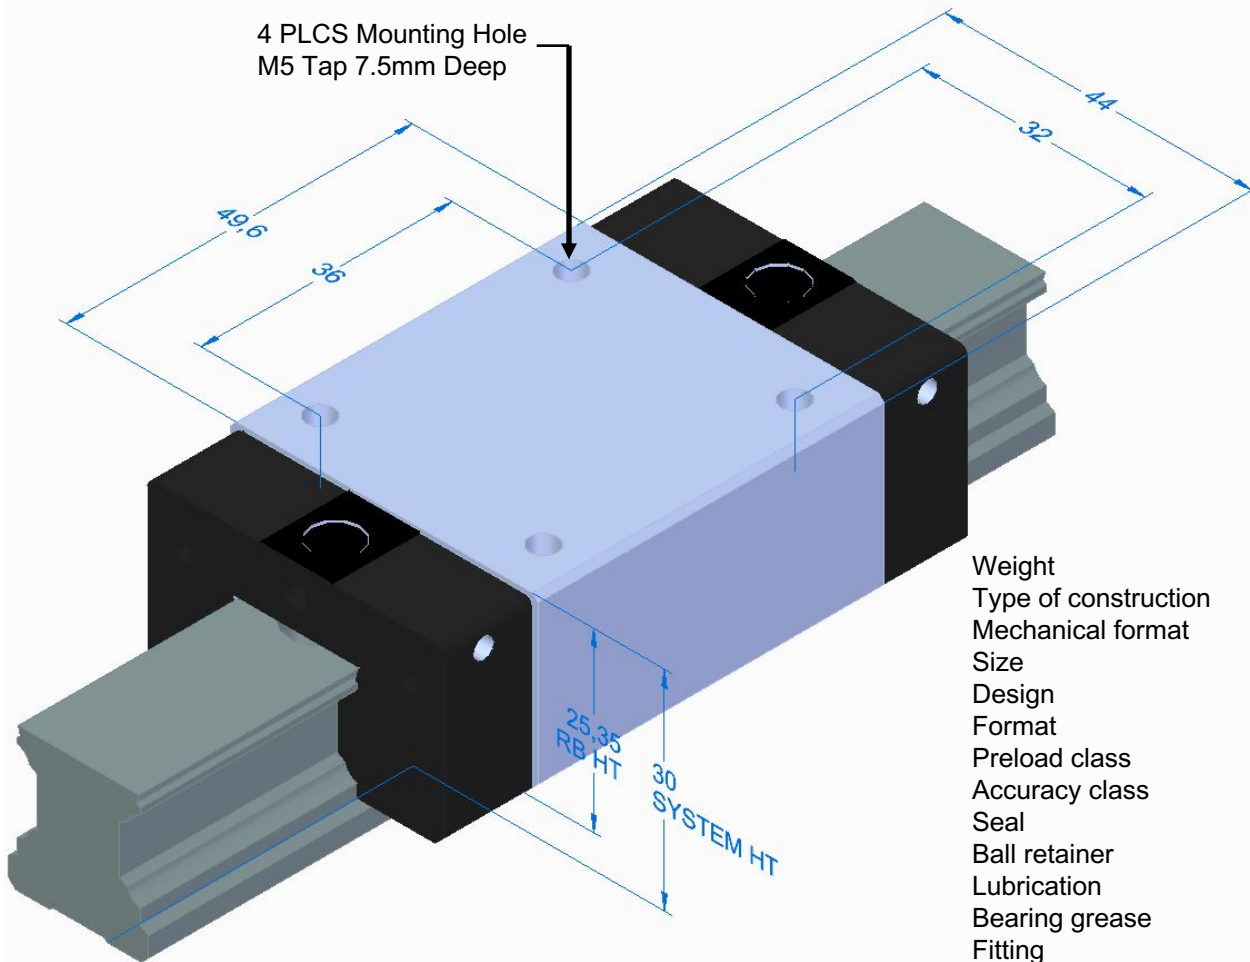

Weight
Type of construction
Mechanical format
Size
Design
Format
Preload class
Accuracy class
Seal
Ball retainer
Lubrication
Bearing grease
Fitting

0.35 kg
FW runner block
KWD Ball runner block
20
SNS Flanged, normal, standard height
CS Carbon steel
C1 low preload
N Normal
SS Standard seal
0 Without ball retainer
01 Prelubricated, preserved
S1 Dynalub 510
M5X7.5

10 MILLION METER RELUBRICATION SCHEDULE

RATINGS

23,400 N	Basic Dynamic Capacity	5,260	lbs
29,800 N	Static Capacity	6,700	lbs
300 Nm	Roll Moment Dynamic Capacity	221	ft-lbs
380 Nm	Roll Moment Static Capacity	280	ft-lbs
200 Nm	Pitch/Yaw Moment Dynamic Capacity	147	ft-lbs
260 Nm	Pitch/Yaw Moment Static Capacity	192	ft-lbs

ENGLISH

Bosch Rexroth BSHP Ball Rail Runner Block
KWD-020-SNS-CS-C1-N-SS-0-01-S1-00-BX-LS-000-RS-000-01

PN: 1622-894-20



www.evolutionmotion.com

rexroth
A Bosch Company

UNITS : mm