


4 PLCS Mounting Hole
Either M5 Tap Or Can Be Used as
Thru Hole for M4 Nut and Bolt

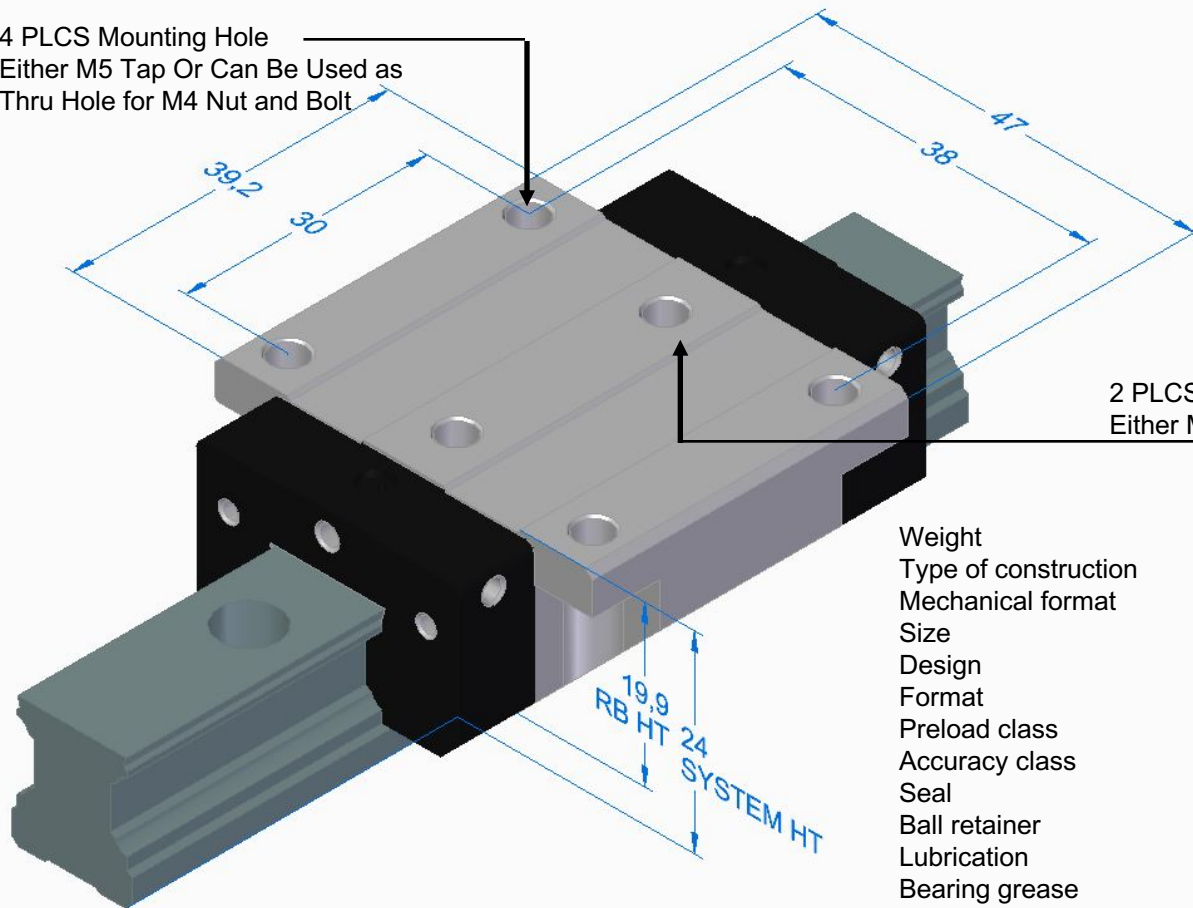

2 PLCS Mounting Hole
Either M5 Tap

Weight
Type of construction
Mechanical format
Size
Design
Format
Preload class
Accuracy class
Seal
Ball retainer
Lubrication
Bearing grease
Fitting

0.20 kg
FW runner block
KWD Ball runner block
15
FNS Flanged, normal, standard height
CS Carbon steel
C1 low preload
N Normal
SS Standard seal
0 Without ball retainer
01 Prelubricated, preserved
S1 Dynalub 510
M6X8



10 MILLION METER RELUBRICATION SCHEDULE

RATINGS

9,860 N	Basic Dynamic Capacity	2220	lbs
12,700 N	Static Capacity	2855	lbs
95 Nm	Roll Moment Dynamic Capacity	70	ft-lbs
120 Nm	Roll Moment Static Capacity	88	ft-lbs
68 Nm	Pitch/Yaw Moment Dynamic Capacity	50	ft-lbs
87 Nm	Pitch/Yaw Moment Static Capacity	64	ft-lbs

ENGLISH

Bosch Rexroth BSHP Ball Rail Runner Block
KWD-015-FNS-CS-C1-N-SS-0-01-S1-00-BX-LS-000-RS-000-01

PN: 1651-114-20



www.evolutionmotion.com

rexroth
A Bosch Company

UNITS : mm