


4 PLCS Mounting Hole
Either M8 Tap Or Can Be Used as
Thru Hole for M6 Nut and Bolt

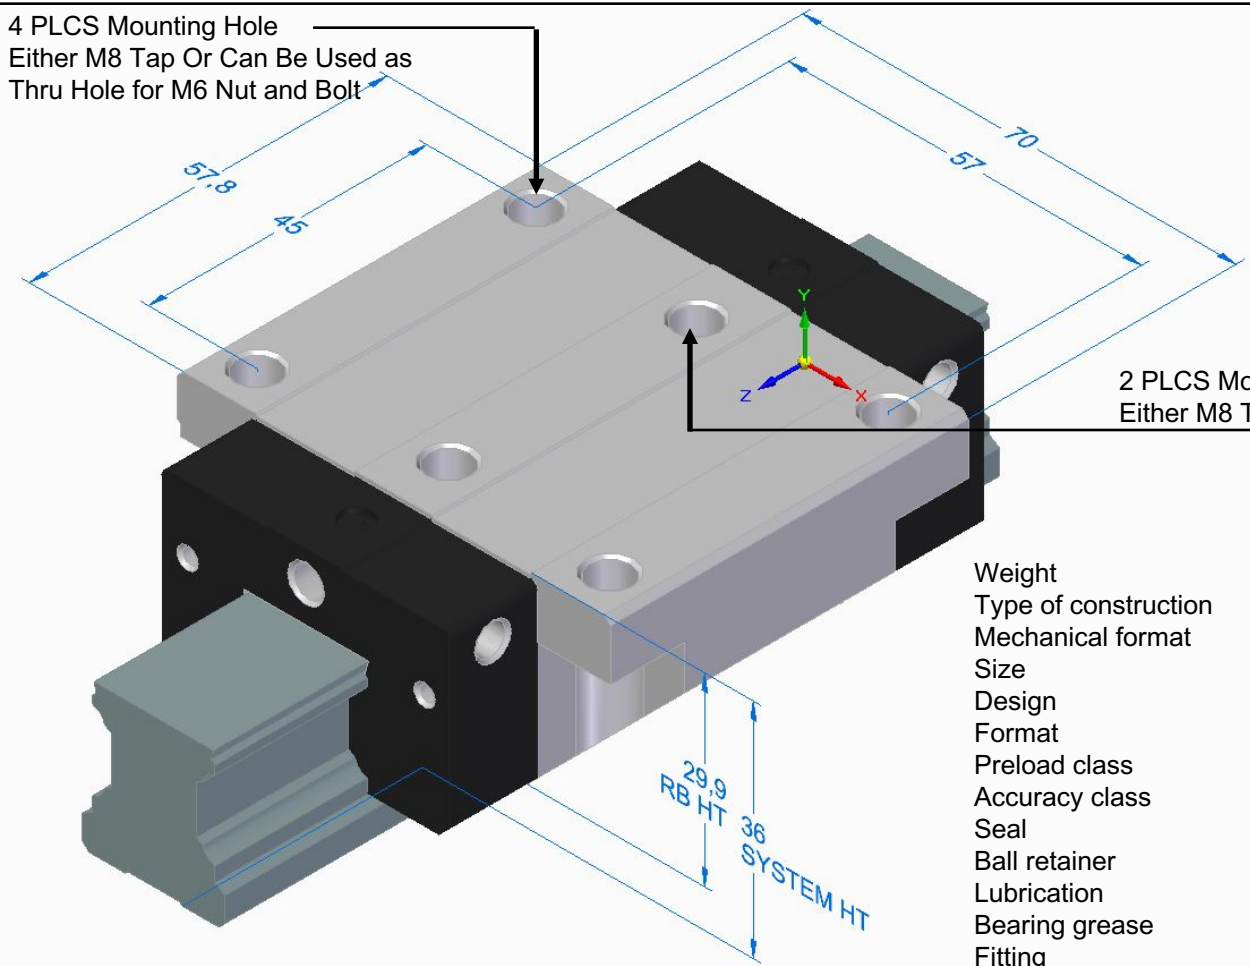

2 PLCS Mounting Hole
Either M8 Tap

Weight
Type of construction
Mechanical format
Size
Design
Format
Preload class
Accuracy class
Seal
Ball retainer
Lubrication
Bearing grease
Fitting

0.65 kg
FW runner block
KWD Ball runner block
25
FNS Flanged, normal, standard height
CS Carbon steel
C1 low preload
N Normal
SS Standard seal
0 Without ball retainer
01 Prelubricated, preserved
S1 Dynalub 510
M6X8



10 MILLION METER RELUBRICATION SCHEDULE

RATINGS		ENGLISH
28,600 N	Basic Dynamic Capacity	6530 lbs
35,900 N	Static Capacity	8071 lbs
410 Nm	Roll Moment Dynamic Capacity	302 ft-lbs
510 Nm	Roll Moment Static Capacity	346 ft-lbs
290 Nm	Pitch/Yaw Moment Dynamic Capacity	214 ft-lbs
360 Nm	Pitch/Yaw Moment Static Capacity	266 ft-lbs

Bosch Rexroth BSHP Ball Rail Runner Block
KWD-025-FNS-CS-C1-N-SS-0-01-S1-00-BX-LS-000-RS-000-01

PN: 1651-214-20



UNITS : mm

www.evolutionmotion.com