


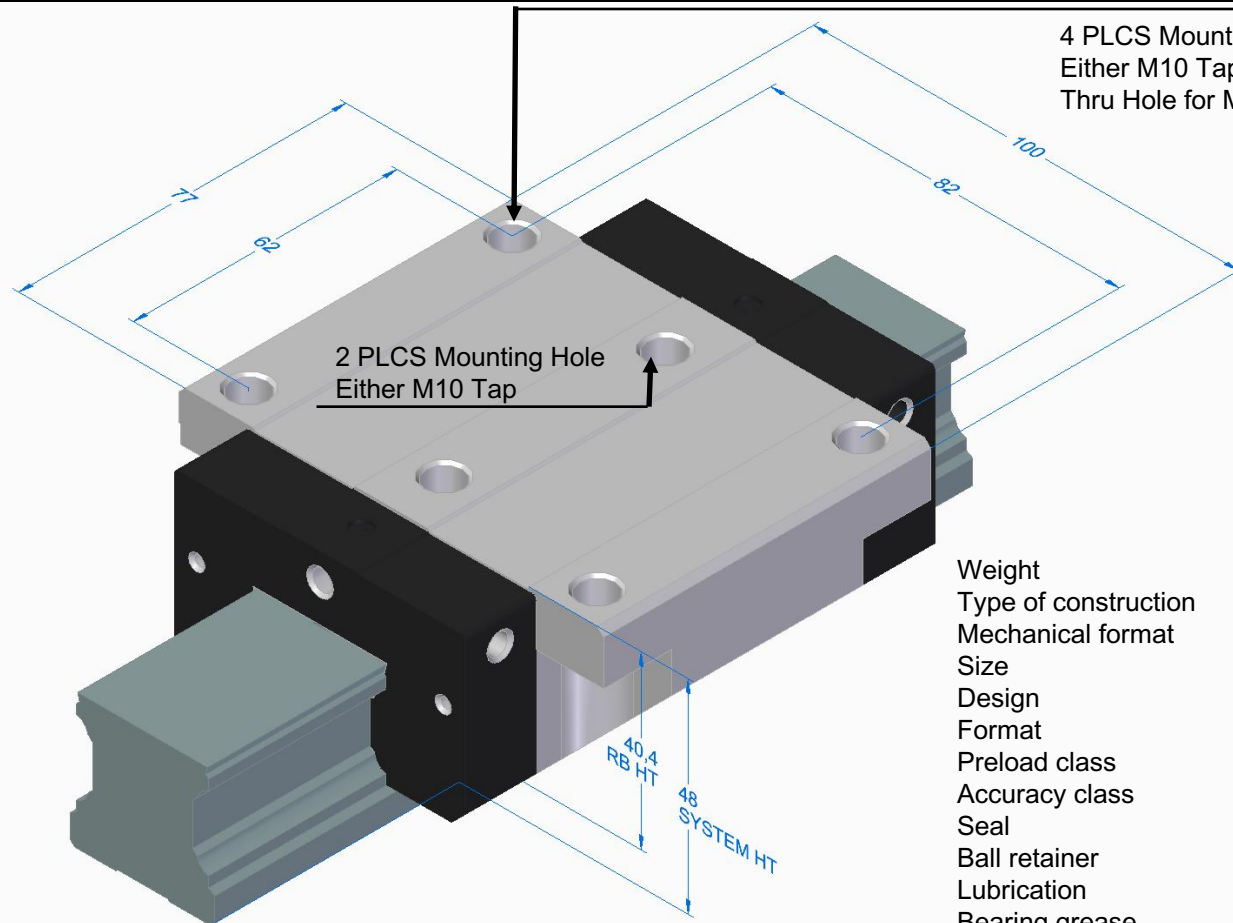

4 PLCS Mounting Hole
Either M10 Tap Or Can Be Used as
Thru Hole for M8 Nut and Bolt

2 PLCS Mounting Hole
Either M10 Tap

Weight
Type of construction
Mechanical format
Size
Design
Format
Preload class
Accuracy class
Seal
Ball retainer
Lubrication
Bearing grease
Fitting

0.65 kg
FW runner block
KWD Ball runner block
35
FNS Flanged, normal, standard height
CS Carbon steel
C0 without preload
N Normal
SS Standard seal
0 Without ball retainer
01 Prelubricated, preserved
S1 Dynalub 510
M6X8



10 MILLION METER RELUBRICATION SCHEDULE

RATINGS

51,800 N	Basic Dynamic Capacity	11,645	lbs
80,900 N	Static Capacity	18,187	lbs
1,110 Nm	Roll Moment Dynamic Capacity	819	ft-lbs
1,740 Nm	Roll Moment Static Capacity	1,283	ft-lbs
7,620 Nm	Pitch/Yaw Moment Dynamic Capacity	5620	ft-lbs
1,130 Nm	Pitch/Yaw Moment Static Capacity	833	ft-lbs

ENGLISH

Bosch Rexroth BSHP Ball Rail Runner Block
KWD-035-FNS-CS-C0-N-SS-0-01-S1-00-BX-LS-000-RS-000-01

PN: 1651-394-20



www.evolutionmotion.com

rexroth
A Bosch Company

UNITS : mm