




4 PLCS Mounting Hole
Either M12 Tap Or Can Be Used as
Thru Hole for M10 Nut and Bolt

2 PLCS Mounting Hole
Either M12 Tap

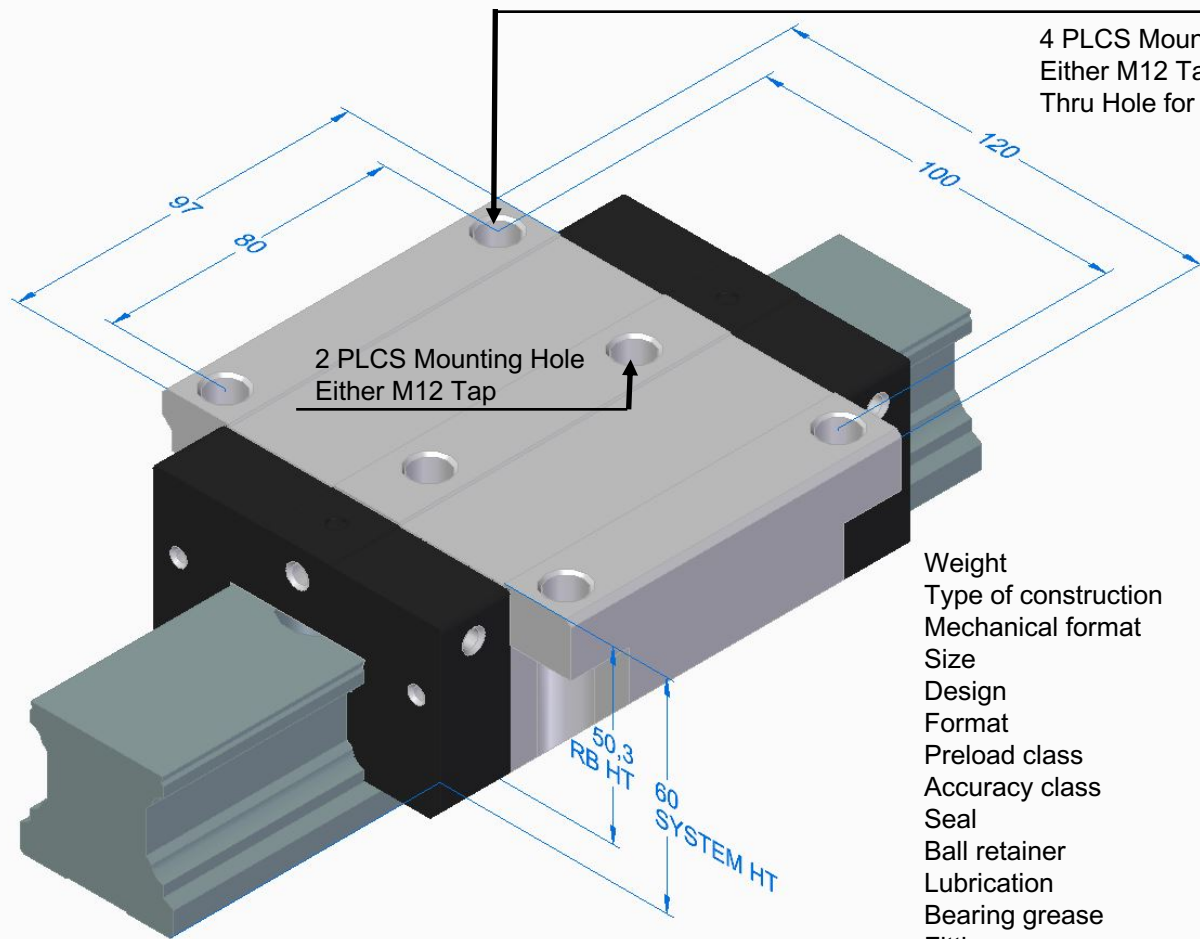

Weight
Type of construction
Mechanical format
Size
Design
Format
Preload class
Accuracy class
Seal
Ball retainer
Lubrication
Bearing grease
Fitting

3.00 kg
FW runner block
KWD Ball runner block
45
FNS Flanged, normal, standard height
CS Carbon steel
C1 low preload
N Normal
SS Standard seal
0 Without ball retainer
01 Prelubricated, preserved
S1 Dynalub 510
M6X8

10 MILLION METER RELUBRICATION SCHEDULE

RATINGS

86,400 N	Basic Dynamic Capacity	19,425	lbs
132,000 N	Static Capacity	29,675	lbs
2,330 Nm	Roll Moment Dynamic Capacity	1,715	ft-lbs
3,560 Nm	Roll Moment Static Capacity	2,625	ft-lbs
1,540 Nm	Pitch/Yaw Moment Dynamic Capacity	1,136	ft-lbs
2,350 Nm	Pitch/Yaw Moment Static Capacity	1,733	ft-lbs

ENGLISH

Bosch Rexroth BSHP Ball Rail Runner Block
KWD-045-FNS-CS-C1-N-SS-0-01-S1-00-BX-LS-000-RS-000-01

PN: 1651-414-20



www.evolutionmotion.com

rexroth
A Bosch Company

UNITS : mm