




Low Drag Runner Block Version
No End Seals – Oil Preserved

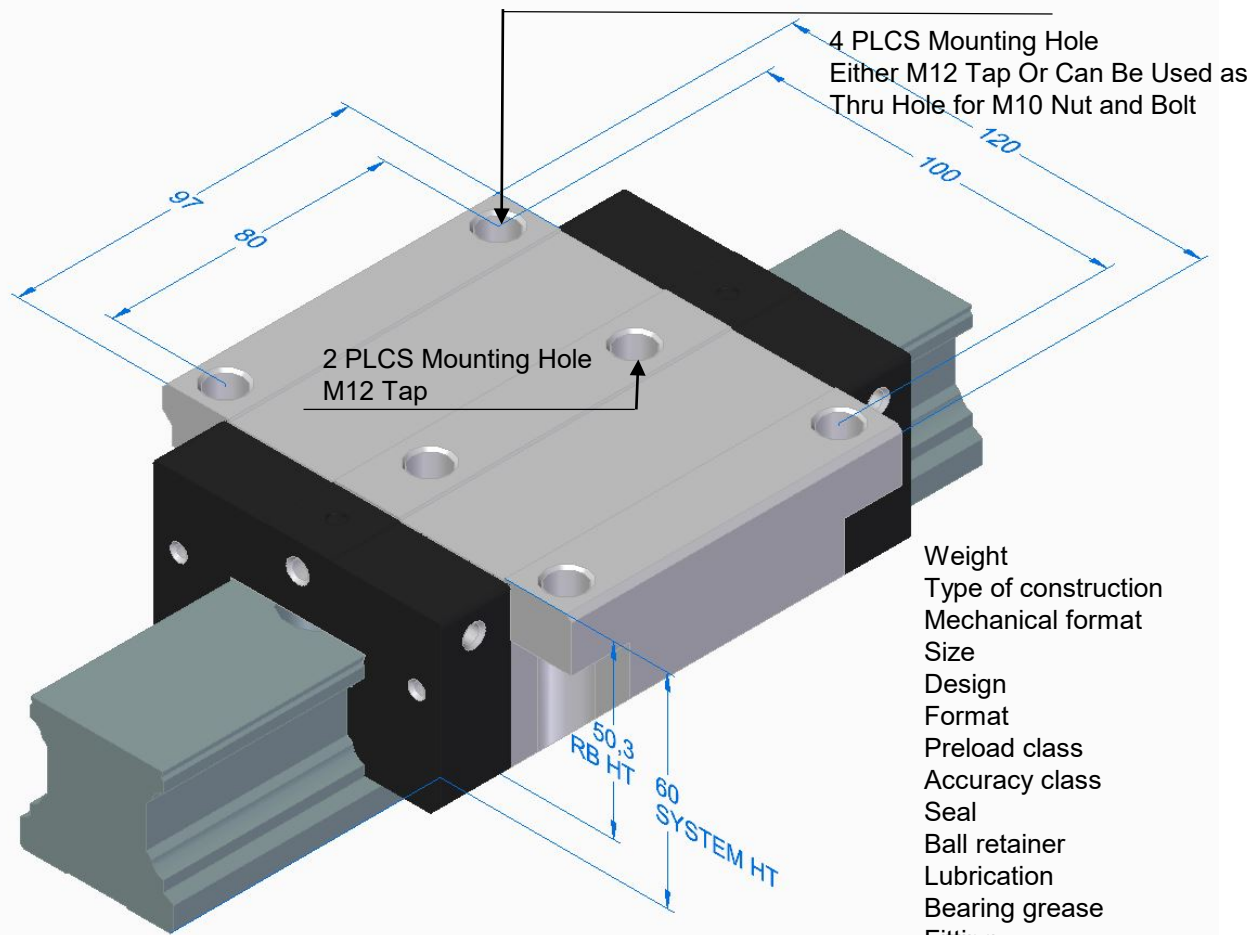

Weight
Type of construction
Mechanical format
Size
Design
Format
Preload class
Accuracy class
Seal
Ball retainer
Lubrication
Bearing grease
Fitting

3.00 kg
FW runner block
KWD Ball runner block
45
FNS Flanged, normal, standard height
CS Carbon steel
C0 – 10 micron clearance
N Normal
LS/99 – Low Friction/No seal
0 Without ball retainer
02 Preserved
00 No Lube
M12X15

10 MILLION METER RELUBRICATION SCHEDULE

RATINGS

	ENGLISH
86,400 N Basic Dynamic Capacity	19,425 lbs
132,000 N Static Capacity	29,675 lbs
2,330 Nm Roll Moment Dynamic Capacity	1,715 ft-lbs
3,560 Nm Roll Moment Static Capacity	2,625 ft-lbs
1,540 Nm Pitch/Yaw Moment Dynamic Capacity	1,136 ft-lbs
2,350 Nm Pitch/Yaw Moment Static Capacity	1,733 ft-lbs

Bosch Rexroth BSHP Ball Rail Runner Block
KWD-035-SNS-CS-C0-N-LS/99-0-02-00-BX-LS-000-RS-000-01

PN: 1651-494-25_R030101331_LD

Low Drag



www.evolutionmotion.com

rexroth
A Bosch Company

UNITS : mm