


4 PLCS Mounting Hole
Either M10 Tap Or Can Be Used as
Thru Hole for M8 Nut and Bolt

2 PLCS Mounting Hole
Either M10 Tap

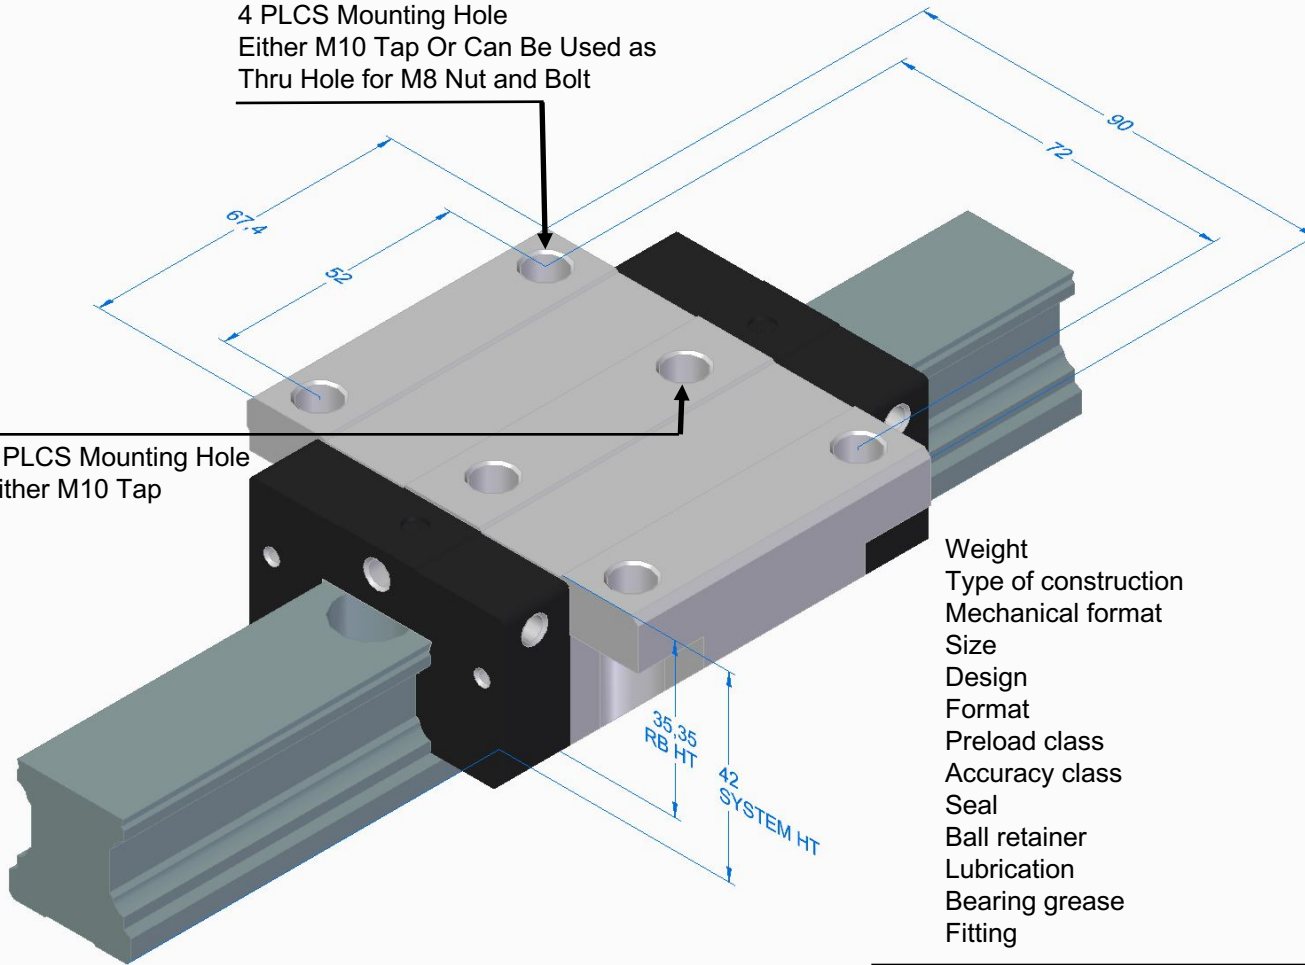

Weight	1.10 kg
Type of construction	FW runner block
Mechanical format	KWD Ball runner block
Size	30
Design	FNS Flanged, normal, standard height
Format	CS Carbon steel
Preload class	C1 low preload
Accuracy class	N Normal
Seal	SS Standard seal
Ball retainer	0 Without ball retainer
Lubrication	01 Prelubricated, preserved
Bearing grease	S1 Dynalub 510
Fitting	M6X8

10 MILLION METER RELUBRICATION SCHEDULE

RATINGS

36,500 N	Basic Dynamic Capacity	8,205	lbs
48,100 N	Static Capacity	10,813	lbs
630 Nm	Roll Moment Dynamic Capacity	465	ft-lbs
830 Nm	Roll Moment Static Capacity	612	ft-lbs
440 Nm	Pitch/Yaw Moment Dynamic Capacity	325	ft-lbs
580 Nm	Pitch/Yaw Moment Static Capacity	428	ft-lbs

ENGLISH

Bosch Rexroth BSHP Ball Rail Runner Block
KWD-030-FNS-CS-C1-N-SS-0-01-S1-00-BX-LS-000-RS-000-01
PN: 1651-714-20



www.evolutionmotion.com

rexroth
A Bosch Company

UNITS : mm