


4 PLCS Mounting Hole
Either M10 Tap Or Can Be Used as
Thru Hole for M8 Nut and Bolt



Low Drag Runner Block Version
No End Seals – Oil Preserved



2 PLCS Mounting Hole
M10 Tap

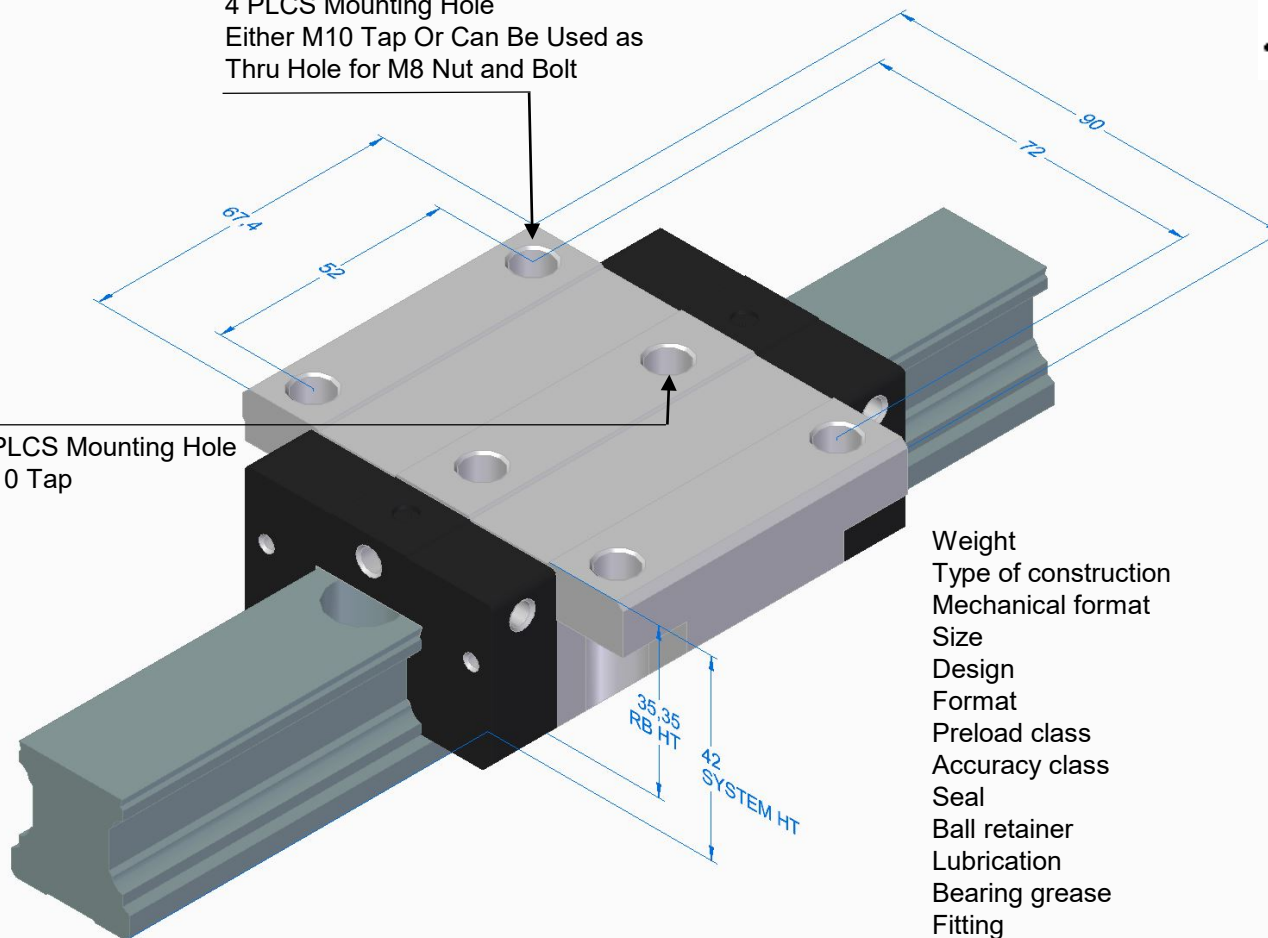

Weight
Type of construction
Mechanical format
Size
Design
Format
Preload class
Accuracy class
Seal
Ball retainer
Lubrication
Bearing grease
Fitting

1.10 kg
FW runner block
KWD Ball runner block
30
FNS Flanged, normal, standard height
CS Carbon steel
C0 – 10 micron clearance
N Normal
LS/99 – Low Friction/No seal
0 Without ball retainer
02 Preserved
00 No Lube
M10X11

10 MILLION METER RELUBRICATION SCHEDULE

RATINGS

	ENGLISH
36,500 N Basic Dynamic Capacity	8,205 lbs
48,100 N Static Capacity	10,813 lbs
630 Nm Roll Moment Dynamic Capacity	465 ft-lbs
830 Nm Roll Moment Static Capacity	612 ft-lbs
440 Nm Pitch/Yaw Moment Dynamic Capacity	325 ft-lbs
580 Nm Pitch/Yaw Moment Static Capacity	428 ft-lbs

Bosch Rexroth BSHP Ball Rail Runner Block
KWD-030-FNS-CS-C0-N-LS/99-0-02-00-BX-LS-000-RS-000-01

PN: 1651-794-25_R030101332_LD

Low Drag



www.evolutionmotion.com

rexroth
A Bosch Company

UNITS : mm