


4 PLCS Mounting Hole  
Either M6 Tap Or Can Be Used as  
Thru Hole for M5 Nut and Bolt

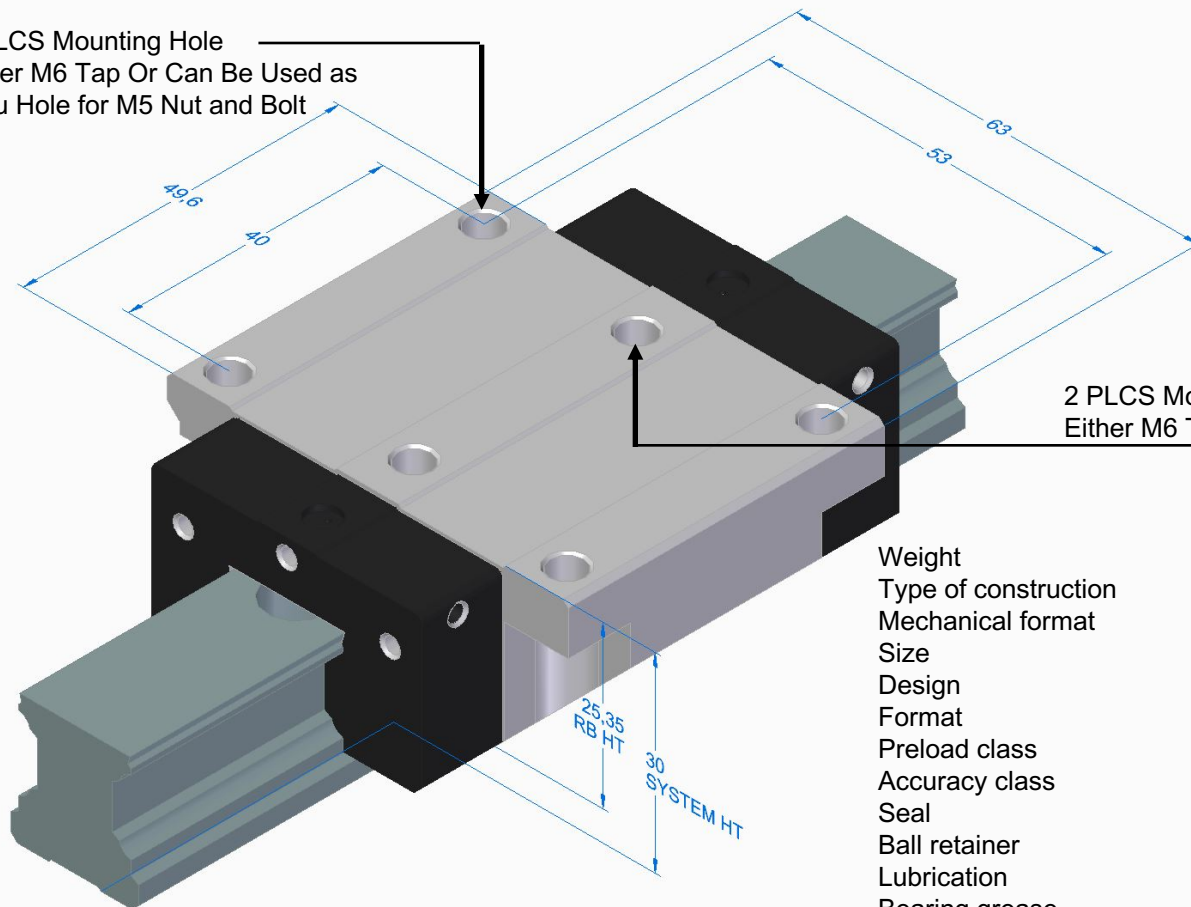

2 PLCS Mounting Hole  
Either M6 Tap

Weight  
Type of construction  
Mechanical format  
Size  
Design  
Format  
Preload class  
Accuracy class  
Seal  
Ball retainer  
Lubrication  
Bearing grease  
Fitting

0.45 kg  
FW runner block  
KWD Ball runner block  
20  
FNS Flanged, normal, standard height  
CS Carbon steel  
C0 without preload  
N Normal  
SS Standard seal  
0 Without ball retainer  
01 Prelubricated, preserved  
S1 Dynalub 510  
M6X8



## 10 MILLION METER RELUBRICATION SCHEDULE

### RATINGS

|          |                                   |       |        |
|----------|-----------------------------------|-------|--------|
| 23,400 N | Basic Dynamic Capacity            | 5,260 | lbs    |
| 29,800 N | Static Capacity                   | 6,700 | lbs    |
| 300 Nm   | Roll Moment Dynamic Capacity      | 221   | ft-lbs |
| 380 Nm   | Roll Moment Static Capacity       | 280   | ft-lbs |
| 200 Nm   | Pitch/Yaw Moment Dynamic Capacity | 147   | ft-lbs |
| 260 Nm   | Pitch/Yaw Moment Static Capacity  | 192   | ft-lbs |

### ENGLISH

Bosch Rexroth BSHP Ball Rail Runner Block  
KWD-020-FNS-CS-C0-N-SS-0-01-S1-00-BX-LS-000-RS-000-01

**PN: 1651-894-20**



[www.evolutionmotion.com](http://www.evolutionmotion.com)

**rexroth**  
A Bosch Company

UNITS : mm