


6 PLCS Mounting Hole
M8 Tap 9.35mm Deep



Weight
Type of construction
Mechanical format
Size
Design
Format
Preload class
Accuracy class
Seal
Ball retainer
Lubrication
Bearing grease
Fitting

1.20 kg
FW runner block
KWD Ball runner block
25/70
BNS Wide, normal, standard height
CS Carbon steel
C0 – 10 micron clearance
N Normal
LS/99 – Low Friction/No seal
0 Without ball retainer
02 Preserved
00 No Lube
M8X9.35

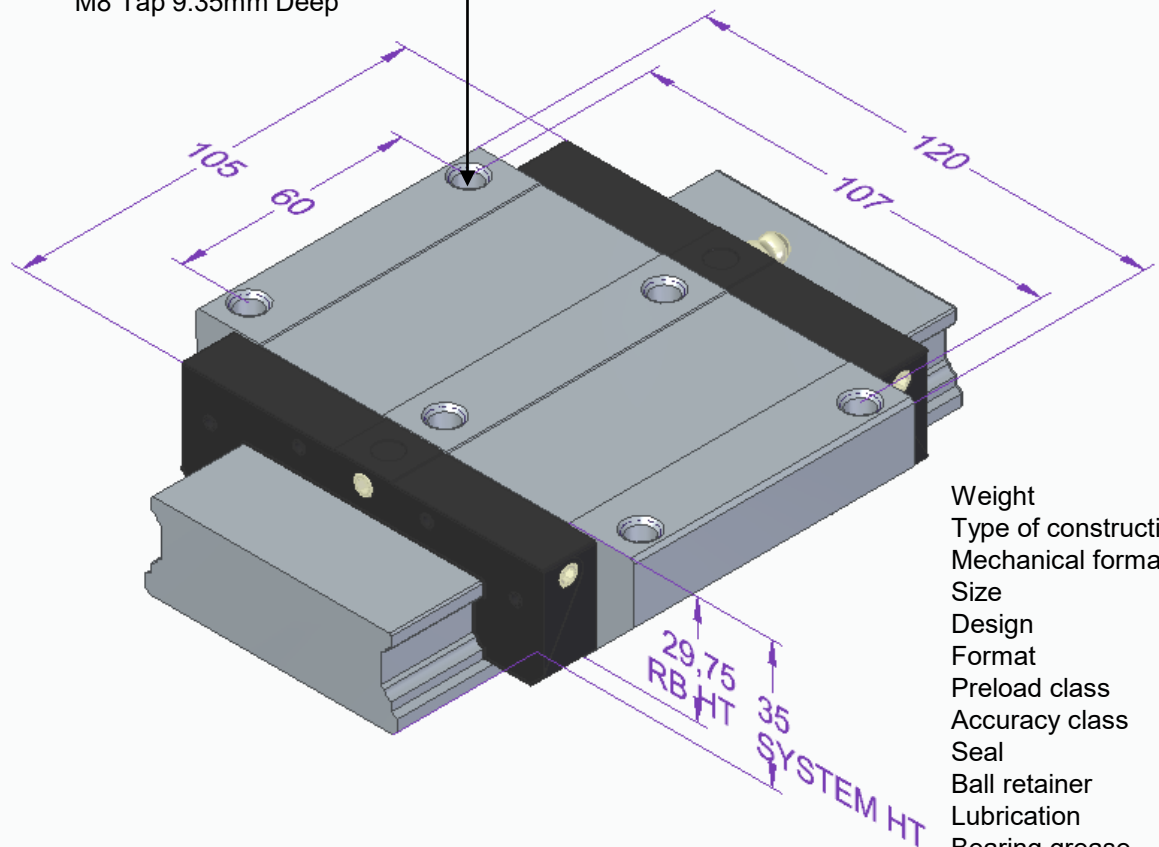

Low Drag Runner Block Version
No End Seals – Oil Preserved



10 MILLION METER RELUBRICATION SCHEDULE

RATINGS

36,200 N	Basic Dynamic Capacity	26,700	lbs
50,200 N	Static Capacity	37,025	lbs
1,350 Nm	Roll Moment Dynamic Capacity	995	ft-lbs
1,870 Nm	Roll Moment Static Capacity	1,380	ft-lbs
490 Nm	Pitch/Yaw Moment Dynamic Capacity	361	ft-lbs
680 Nm	Pitch/Yaw Moment Static Capacity	501	ft-lbs

ENGLISH

Bosch Rexroth BSHP Ball Rail Runner Block
KWD-025-BNS-CS-C0-N-LS/99-0-02-00-BX-LS-000-RS-000-01

PN: 1671-294-25_R030101333_LD

Low Drag



www.evolutionmotion.com

rexroth
A Bosch Company

UNITS : mm