


6 PLCS Mounting Hole
M6 Tap 7.7mm Deep



Weight
Type of construction
Mechanical format
Size
Design
Format
Preload class
Accuracy class
Seal
Ball retainer
Lubrication
Bearing grease
Fitting

0.40 kg
FW runner block
KWD Ball runner block
20/40
BNS Wide, normal, standard height
CS Carbon steel
C0 – 10 micron clearance
N Normal
LS/99 – Low Friction/No seal
0 Without ball retainer
02 Preserved
00 No Lube
M6X7.7

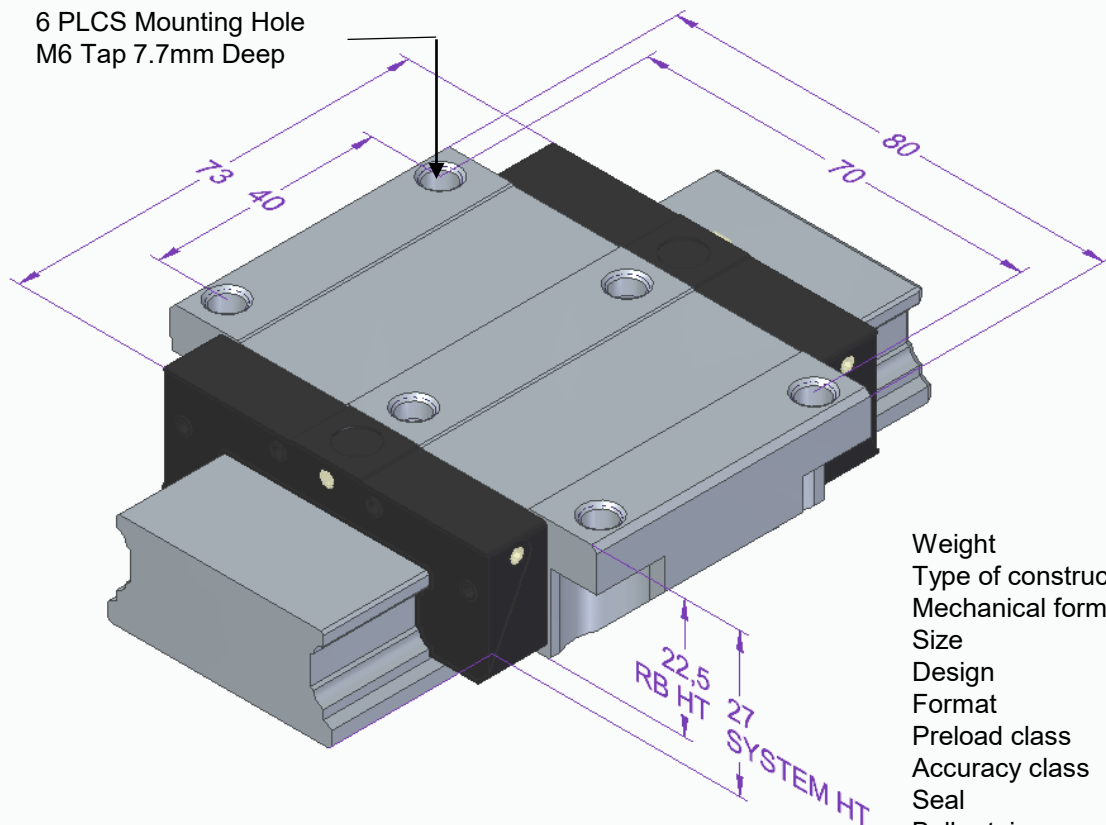

Low Drag Runner Block Version
No End Seals – Oil Preserved

**Ball Rail &
Runner Block**



**STOCKING
PROGRAM**

10 MILLION METER RELUBRICATION SCHEDULE

RATINGS

14,900 N	Basic Dynamic Capacity	10,989	lbs
20,600 N	Static Capacity	15,194	lbs
340 Nm	Roll Moment Dynamic Capacity	819	ft-lbs
470 Nm	Roll Moment Static Capacity	1,283	ft-lbs
140 Nm	Pitch/Yaw Moment Dynamic Capacity	5620	ft-lbs
190 Nm	Pitch/Yaw Moment Static Capacity	833	ft-lbs

ENGLISH

Bosch Rexroth BSHP Ball Rail Runner Block
KWD-020-BNS-CS-C0-N-LS/99-0-02-00-BX-LS-000-RS-000-01

PN: 1671-594-25_R030101334_LD

Low Drag



www.evolutionmotion.com

rexroth
A Bosch Company

UNITS : mm